



## BURLINGTON PEARL RECT 120X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A043681</b> | 120X120   | 9,20           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |
| Light Reflectance Value (LRV)        |                 | 76                      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                            |                |         |
|----------------------------|----------------|---------|
| Slip resistance (Rd)       | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)        | EN 16165-B     | R10     |
| Slip resistance (barefeet) | EN 16165-A     | B       |

## ANTI-SLIP BURLINGTON PEARL

### RECT 120X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A043683</b> | 120X120   | 9,10           | PC BIA GL |



#### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|-------------------------------------------------------------|--------------|----------------------------------|

#### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |
| Light Reflectance Value (LRV)        |                 | 69                      |

#### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alkalis                                  | EN ISO 10545-13 | GLB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |

#### ANTI-SLIP CHARACTERISTICS

|                            |                |         |
|----------------------------|----------------|---------|
| Slip resistance (Rd)       | UNE-EN 16165-C | Class 3 |
| Slip resistance (R)        | EN 16165-B     | R11     |
| Slip resistance (barefeet) | EN 16165-A     | C       |

## BURLINGTON PEARL RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A037729</b> | 60X120    | 8,80           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |
| Light Reflectance Value (LRV)        |                 | 75                      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                            |                |         |
|----------------------------|----------------|---------|
| Slip resistance (Rd)       | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)        | EN 16165-B     | R10     |
| Slip resistance (barefeet) | EN 16165-A     | B       |

## ANTI-SLIP BURLINGTON PEARL

### RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A037730</b> | 60X120    | 9,10           | PC BIA GL |



#### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|-------------------------------------------------------------|--------------|----------------------------------|

#### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |
| Light Reflectance Value (LRV)        |                 | 70                      |

#### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alkalis                                  | EN ISO 10545-13 | GLB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

#### ANTI-SLIP CHARACTERISTICS

|                            |                |         |
|----------------------------|----------------|---------|
| Slip resistance (Rd)       | UNE-EN 16165-C | Class 3 |
| Slip resistance (R)        | EN 16165-B     | R11     |
| Slip resistance (barefeet) | EN 16165-A     | C       |



## BURLINGTON PEARL RECT 75X75

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A037738</b> | 75X75     | 9,20           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |
| Light Reflectance Value (LRV)        |                 | 75                      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |


### ANTI-SLIP CHARACTERISTICS

|                            |                |         |
|----------------------------|----------------|---------|
| Slip resistance (Rd)       | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)        | EN 16165-B     | R10     |
| Slip resistance (barefeet) | EN 16165-A     | B       |

## ANTI-SLIP BURLINGTON PEARL

### RECT 75X75

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A037739</b> | 75X75     | 9,20           | PC BIA GL |

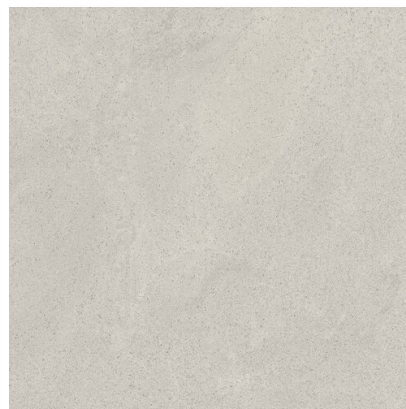

#### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|-------------------------------------------------------------|--------------|----------------------------------|

#### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |
| Light Reflectance Value (LRV)        |                 | 66                      |

#### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alkalis                                  | EN ISO 10545-13 | GLB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

#### ANTI-SLIP CHARACTERISTICS

|                            |                |         |
|----------------------------|----------------|---------|
| Slip resistance (Rd)       | UNE-EN 16165-C | Class 3 |
| Slip resistance (R)        | EN 16165-B     | R11     |
| Slip resistance (barefeet) | EN 16165-A     | C       |



## BURLINGTON PEARL RECT 60X60

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A037720</b> | 60X60     | 8,90           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                            |                |         |
|----------------------------|----------------|---------|
| Slip resistance (Rd)       | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)        | EN 16165-B     | R10     |
| Slip resistance (barefeet) | EN 16165-A     | B       |

## BURLINGTON PEARL RECT 30X60

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038205</b> | 30X60     | 8,30           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |
| Light Reflectance Value (LRV)        |                 | 75                      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                            |                |         |
|----------------------------|----------------|---------|
| Slip resistance (Rd)       | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)        | EN 16165-B     | R10     |
| Slip resistance (barefeet) | EN 16165-A     | B       |

## PELDAÑO RECTO ANT. C3

### BURLINGTON PEARL 33X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP   |
|----------------|-----------|----------------|---------|
| <b>A038135</b> | 33X120    | 32,00          | EXTRUSI |



#### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|-------------------------------------------------------------|--------------|----------------------------------|

#### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | 0,5 %= Eb=3%            |
| Flexion resistance                   | EN ISO 10545-04 | => 30 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

#### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLA |
| Resistance to alkalis                                  | EN ISO 10545-13 | GLA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

#### ANTI-SLIP CHARACTERISTICS

|                            |                |         |
|----------------------------|----------------|---------|
| Slip resistance (Rd)       | UNE-EN 16165-C | Class 3 |
| Slip resistance (R)        | EN 16165-B     | R11     |
| Slip resistance (barefeet) | EN 16165-A     | C       |

TABICA BURLINGTON PEARL 15X120

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP     |
|-----------|-----------|----------------|-----------|
| A038998   | 15X120    | 10,40          | PC BIA GL |



DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

CHEMICAL PROPERTIES

## BURLINGTON PEARL RECT 30X90

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP   |
|----------------|-----------|----------------|---------|
| <b>A037893</b> | 30X90     | 8,30           | REVESTI |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                               |                 |                        |
|-------------------------------|-----------------|------------------------|
| Water absorption capacity     | EN ISO 10545-03 | >10%                   |
| Flexion resistance            | EN ISO 10545-04 | =>12 N/mm <sup>2</sup> |
| Thermal shock resistance      | EN ISO 10545-09 | It stands the test     |
| Cracking resistance           | EN ISO 10545-11 | It stands the test     |
| Frost resistance              | EN ISO 10545-12 | Not pass the test      |
| Light Reflectance Value (LRV) |                 | 78                     |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

## EDEN PEARL RECT 30X90

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP   |
|----------------|-----------|----------------|---------|
| <b>A037907</b> | 30X90     | 10,20          | REVESTI |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                           |                 |                        |
|---------------------------|-----------------|------------------------|
| Water absorption capacity | EN ISO 10545-03 | >10%                   |
| Flexion resistance        | EN ISO 10545-04 | =>12 N/mm <sup>2</sup> |
| Thermal shock resistance  | EN ISO 10545-09 | It stands the test     |
| Cracking resistance       | EN ISO 10545-11 | It stands the test     |
| Frost resistance          | EN ISO 10545-12 | Not pass the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLA |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

## DECOR BURLINGTON PEARL 30X90

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP   |
|----------------|-----------|----------------|---------|
| <b>A037883</b> | 30X90     | 9,50           | REVESTI |



### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

Frost resistance

EN ISO 10545-12

Not pass the test

### CHEMICAL PROPERTIES

## DECOR DURHAM I PEARL 30X90

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP   |
|----------------|-----------|----------------|---------|
| <b>A037876</b> | 30X90     | 9,10           | REVESTI |



### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

Frost resistance

EN ISO 10545-12

Not pass the test

### CHEMICAL PROPERTIES

## DECOR DURHAM II PEARL 30X90

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP   |
|----------------|-----------|----------------|---------|
| <b>A038043</b> | 30X90     | 9,10           | REVESTI |



### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

|                  |                 |                   |
|------------------|-----------------|-------------------|
| Frost resistance | EN ISO 10545-12 | Not pass the test |
|------------------|-----------------|-------------------|

### CHEMICAL PROPERTIES

## DECOR DURHAM III PEARL 30X90

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP   |
|----------------|-----------|----------------|---------|
| <b>A038044</b> | 30X90     | 9,10           | REVESTI |



### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

Frost resistance

EN ISO 10545-12

Not pass the test

### CHEMICAL PROPERTIES



## BURLINGTON IVORY RECT 120X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A043680</b> | 120X120   | 9,40           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |
| Light Reflectance Value (LRV)        |                 | 76                      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                            |                |         |
|----------------------------|----------------|---------|
| Slip resistance (Rd)       | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)        | EN 16165-B     | R10     |
| Slip resistance (barefeet) | EN 16165-A     | B       |

## ANTI-SLIP BURLINGTON IVORY RECT 120X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A043682</b> | 120X120   | 9,20           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |
| Light Reflectance Value (LRV)        |                 | 69                      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alkalis                                  | EN ISO 10545-13 | GLB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                            |                |         |
|----------------------------|----------------|---------|
| Slip resistance (Rd)       | UNE-EN 16165-C | Class 3 |
| Slip resistance (R)        | EN 16165-B     | R11     |
| Slip resistance (barefeet) | EN 16165-A     | C       |

## BURLINGTON IVORY RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A037733</b> | 60X120    | 9,40           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |
| Light Reflectance Value (LRV)        |                 | 77                      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                            |                |         |
|----------------------------|----------------|---------|
| Slip resistance (Rd)       | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)        | EN 16165-B     | R10     |
| Slip resistance (barefeet) | EN 16165-A     | B       |

## ANTI-SLIP BURLINGTON IVORY

### RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A037734</b> | 60X120    | 8,80           | PC BIA GL |



#### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|-------------------------------------------------------------|--------------|----------------------------------|

#### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |
| Light Reflectance Value (LRV)        |                 | 71                      |

#### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alkalis                                  | EN ISO 10545-13 | GLB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

#### ANTI-SLIP CHARACTERISTICS

|                            |                |         |
|----------------------------|----------------|---------|
| Slip resistance (Rd)       | UNE-EN 16165-C | Class 3 |
| Slip resistance (R)        | EN 16165-B     | R11     |
| Slip resistance (barefeet) | EN 16165-A     | C       |



## BURLINGTON IVORY RECT 75X75

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A037742</b> | 75X75     | 9,10           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |
| Light Reflectance Value (LRV)        |                 | 74                      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                            |                |         |
|----------------------------|----------------|---------|
| Slip resistance (Rd)       | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)        | EN 16165-B     | R10     |
| Slip resistance (barefeet) | EN 16165-A     | B       |

## ANTI-SLIP BURLINGTON IVORY RECT 75X75



| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A037743</b> | 75X75     | 9,10           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |
| Light Reflectance Value (LRV)        |                 | 70                      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alkalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                            |                |         |
|----------------------------|----------------|---------|
| Slip resistance (Rd)       | UNE-EN 16165-C | Class 3 |
| Slip resistance (R)        | EN 16165-B     | R11     |
| Slip resistance (barefeet) | EN 16165-A     | C       |



## BURLINGTON IVORY RECT 60X60

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A037724</b> | 60X60     | 9,10           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |
| Light Reflectance Value (LRV)        |                 | 70                      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                            |                |         |
|----------------------------|----------------|---------|
| Slip resistance (Rd)       | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)        | EN 16165-B     | R10     |
| Slip resistance (barefeet) | EN 16165-A     | B       |

## BURLINGTON IVORY RECT 30X60

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038207</b> | 30X60     | 8,40           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |
| Light Reflectance Value (LRV)        |                 | 70                      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                            |                |         |
|----------------------------|----------------|---------|
| Slip resistance (Rd)       | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)        | EN 16165-B     | R10     |
| Slip resistance (barefeet) | EN 16165-A     | B       |

## PELDAÑO RECTO ANT. C3

### BURLINGTON IVORY 33X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP   |
|----------------|-----------|----------------|---------|
| <b>A038134</b> | 33X120    | 31,70          | EXTRUSI |



#### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|-------------------------------------------------------------|--------------|----------------------------------|

#### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | 0,5 %= Eb=3%            |
| Flexion resistance                   | EN ISO 10545-04 | => 30 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

#### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLA |
| Resistance to alkalis                                  | EN ISO 10545-13 | GLA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

#### ANTI-SLIP CHARACTERISTICS

|                            |                |         |
|----------------------------|----------------|---------|
| Slip resistance (Rd)       | UNE-EN 16165-C | Class 3 |
| Slip resistance (R)        | EN 16165-B     | R11     |
| Slip resistance (barefeet) | EN 16165-A     | C       |

TABICA BURLINGTON IVORY 15X120

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP     |
|-----------|-----------|----------------|-----------|
| A039415   | 15X120    | 9,50           | PC BIA GL |



DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

Frost resistanceEN ISO 10545-12It stands the test

CHEMICAL PROPERTIES

## BURLINGTON IVORY RECT 30X90

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP   |
|----------------|-----------|----------------|---------|
| <b>A037895</b> | 30X90     | 8,70           | REVESTI |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                               |                 |                        |
|-------------------------------|-----------------|------------------------|
| Water absorption capacity     | EN ISO 10545-03 | >10%                   |
| Flexion resistance            | EN ISO 10545-04 | =>12 N/mm <sup>2</sup> |
| Thermal shock resistance      | EN ISO 10545-09 | It stands the test     |
| Cracking resistance           | EN ISO 10545-11 | It stands the test     |
| Frost resistance              | EN ISO 10545-12 | Not pass the test      |
| Light Reflectance Value (LRV) |                 | 78                     |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

## DECOR BURLINGTON IVORY 30X90

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP   |
|----------------|-----------|----------------|---------|
| <b>A037885</b> | 30X90     | 9,50           | REVESTI |



### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

Frost resistance

EN ISO 10545-12

Not pass the test

### CHEMICAL PROPERTIES

## DECOR DURHAM I IVORY 30X90

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP   |
|----------------|-----------|----------------|---------|
| <b>A037877</b> | 30X90     | 9,70           | REVESTI |



### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

Frost resistance

EN ISO 10545-12

Not pass the test

### CHEMICAL PROPERTIES

## DECOR DURHAM II IVORY 30X90

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP   |
|----------------|-----------|----------------|---------|
| <b>A038045</b> | 30X90     | 9,60           | REVESTI |



### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

Frost resistance

EN ISO 10545-12

Not pass the test

### CHEMICAL PROPERTIES

## DECOR DURHAM III IVORY 30X90

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP   |
|----------------|-----------|----------------|---------|
| <b>A038046</b> | 30X90     | 9,60           | REVESTI |



### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

Frost resistance


EN ISO 10545-12

Not pass the test

### CHEMICAL PROPERTIES

## BURLINGTON GREY RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A037731</b> | 60X120    | 8,90           | PC BIA GL |

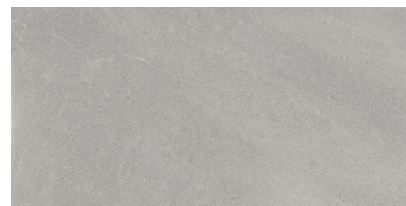

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |
| Light Reflectance Value (LRV)        |                 | 63                      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                            |                |         |
|----------------------------|----------------|---------|
| Slip resistance (Rd)       | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)        | EN 16165-B     | R10     |
| Slip resistance (barefeet) | EN 16165-A     | B       |

## ANTI-SLIP BURLINGTON GREY RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A037732</b> | 60X120    | 8,70           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |
| Light Reflectance Value (LRV)        |                 | 63                      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alkalis                                  | EN ISO 10545-13 | GLB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                            |                |         |
|----------------------------|----------------|---------|
| Slip resistance (Rd)       | UNE-EN 16165-C | Class 3 |
| Slip resistance (R)        | EN 16165-B     | R11     |
| Slip resistance (barefeet) | EN 16165-A     | C       |



## BURLINGTON GREY RECT 60X60

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A037722</b> | 60X60     | 8,70           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |
| Light Reflectance Value (LRV)        |                 | 63                      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                            |                |         |
|----------------------------|----------------|---------|
| Slip resistance (Rd)       | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)        | EN 16165-B     | R10     |
| Slip resistance (barefeet) | EN 16165-A     | B       |

## BURLINGTON GREY RECT 30X60

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038206</b> | 30X60     | 8,90           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |
| Light Reflectance Value (LRV)        |                 | 66                      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                            |                |         |
|----------------------------|----------------|---------|
| Slip resistance (Rd)       | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)        | EN 16165-B     | R10     |
| Slip resistance (barefeet) | EN 16165-A     | B       |

## PELDAÑO RECTO ANT. C3

### BURLINGTON GREY 33X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP   |
|----------------|-----------|----------------|---------|
| <b>A038133</b> | 33X120    | 32,30          | EXTRUSI |



#### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|-------------------------------------------------------------|--------------|----------------------------------|

#### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | 0,5 %= Eb=3%            |
| Flexion resistance                   | EN ISO 10545-04 | => 30 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

#### CHEMICAL PROPERTIES


|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLA |
| Resistance to alkalis                                  | EN ISO 10545-13 | GLA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

#### ANTI-SLIP CHARACTERISTICS

|                            |                |         |
|----------------------------|----------------|---------|
| Slip resistance (Rd)       | UNE-EN 16165-C | Class 3 |
| Slip resistance (R)        | EN 16165-B     | R11     |
| Slip resistance (barefeet) | EN 16165-A     | C       |

## BURLINGTON GREY RECT 30X90

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP   |
|----------------|-----------|----------------|---------|
| <b>A037894</b> | 30X90     | 8,70           | REVESTI |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                               |                 |                        |
|-------------------------------|-----------------|------------------------|
| Water absorption capacity     | EN ISO 10545-03 | >10%                   |
| Flexion resistance            | EN ISO 10545-04 | =>12 N/mm <sup>2</sup> |
| Thermal shock resistance      | EN ISO 10545-09 | It stands the test     |
| Cracking resistance           | EN ISO 10545-11 | It stands the test     |
| Frost resistance              | EN ISO 10545-12 | Not pass the test      |
| Light Reflectance Value (LRV) |                 | 72                     |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

## EDEN GREY RECT 30X90

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP   |
|----------------|-----------|----------------|---------|
| <b>A037908</b> | 30X90     | 10,90          | REVESTI |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES


|                           |                 |                        |
|---------------------------|-----------------|------------------------|
| Water absorption capacity | EN ISO 10545-03 | >10%                   |
| Flexion resistance        | EN ISO 10545-04 | =>12 N/mm <sup>2</sup> |
| Thermal shock resistance  | EN ISO 10545-09 | It stands the test     |
| Cracking resistance       | EN ISO 10545-11 | It stands the test     |
| Frost resistance          | EN ISO 10545-12 | Not pass the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLA |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

## BURLINGTON VOLCANO RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A037737</b> | 60X120    | 9,00           | PC BIA GL |

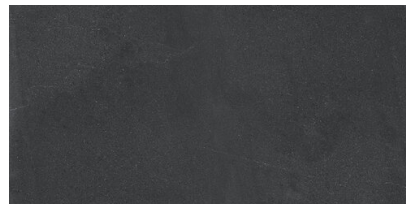

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | II                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |
| Light Reflectance Value (LRV)        |                 | 36.14                   |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alkalis                                  | EN ISO 10545-13 | GLB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                            |                |         |
|----------------------------|----------------|---------|
| Slip resistance (Rd)       | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)        | EN 16165-B     | R10     |
| Slip resistance (barefeet) | EN 16165-A     | B       |

## ANTI-SLIP BURLINGTON VOLCANO

### RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038131</b> | 60X120    | 8,90           | PC BIA GL |



#### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|-------------------------------------------------------------|--------------|----------------------------------|

#### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | II                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |
| Light Reflectance Value (LRV)        |                 | 28                      |

#### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alkalis                                  | EN ISO 10545-13 | GLB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

#### ANTI-SLIP CHARACTERISTICS

|                            |                |         |
|----------------------------|----------------|---------|
| Slip resistance (Rd)       | UNE-EN 16165-C | Class 3 |
| Slip resistance (R)        | EN 16165-B     | R11     |
| Slip resistance (barefeet) | EN 16165-A     | C       |

## BURLINGTON VOLCANO RECT 60X60

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A037728</b> | 60X60     | 8,90           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | II                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |
| Light Reflectance Value (LRV)        |                 | 28                      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alkalis                                  | EN ISO 10545-13 | GLB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                            |                |         |
|----------------------------|----------------|---------|
| Slip resistance (Rd)       | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)        | EN 16165-B     | R10     |
| Slip resistance (barefeet) | EN 16165-A     | B       |

## PELDAÑO RECTO ANT. C3

### BURLINGTON VOLCANO 33X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP   |
|----------------|-----------|----------------|---------|
| <b>A038137</b> | 33X120    | 31,80          | EXTRUSI |



#### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|-------------------------------------------------------------|--------------|----------------------------------|

#### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | 0,5 % = Eb=3%           |
| Flexion resistance                   | EN ISO 10545-04 | => 30 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO 10545-07 | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

#### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLA |
| Resistance to alkalis                                  | EN ISO 10545-13 | GLA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

#### ANTI-SLIP CHARACTERISTICS

|                            |                |         |
|----------------------------|----------------|---------|
| Slip resistance (Rd)       | UNE-EN 16165-C | Class 3 |
| Slip resistance (R)        | EN 16165-B     | R11     |
| Slip resistance (barefeet) | EN 16165-A     | C       |

## CUMBRIAN VOLCANO RECT 30X90

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP   |
|----------------|-----------|----------------|---------|
| <b>A037882</b> | 30X90     | 10,40          | REVESTI |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                           |                 |                        |
|---------------------------|-----------------|------------------------|
| Water absorption capacity | EN ISO 10545-03 | >10%                   |
| Flexion resistance        | EN ISO 10545-04 | =>12 N/mm <sup>2</sup> |
| Thermal shock resistance  | EN ISO 10545-09 | It stands the test     |
| Cracking resistance       | EN ISO 10545-11 | It stands the test     |
| Frost resistance          | EN ISO 10545-12 | Not pass the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLA |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

## BURLINGTON TAUPE RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A037735</b> | 60X120    | 8,80           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |
| Light Reflectance Value (LRV)        |                 | 54                      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                            |                |         |
|----------------------------|----------------|---------|
| Slip resistance (Rd)       | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)        | EN 16165-B     | R10     |
| Slip resistance (barefeet) | EN 16165-A     | B       |

## ANTI-SLIP BURLINGTON TAUPE

### RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A037736</b> | 60X120    | 8,90           | PC BIA GL |



#### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|-------------------------------------------------------------|--------------|----------------------------------|

#### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |
| Light Reflectance Value (LRV)        |                 | 54                      |

#### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alkalis                                  | EN ISO 10545-13 | GLB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

#### ANTI-SLIP CHARACTERISTICS

|                            |                |         |
|----------------------------|----------------|---------|
| Slip resistance (Rd)       | UNE-EN 16165-C | Class 3 |
| Slip resistance (R)        | EN 16165-B     | R11     |
| Slip resistance (barefeet) | EN 16165-A     | C       |



## BURLINGTON TAUPE RECT 60X60

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A037726</b> | 60X60     | 9,70           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |
| Light Reflectance Value (LRV)        |                 | 54                      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                            |                |         |
|----------------------------|----------------|---------|
| Slip resistance (Rd)       | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)        | EN 16165-B     | R10     |
| Slip resistance (barefeet) | EN 16165-A     | B       |

## BURLINGTON TAUPE RECT 30X60

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038208</b> | 30X60     | 8,40           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |
| Light Reflectance Value (LRV)        |                 | 54                      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                            |                |         |
|----------------------------|----------------|---------|
| Slip resistance (Rd)       | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)        | EN 16165-B     | R10     |
| Slip resistance (barefeet) | EN 16165-A     | B       |

## PELDAÑO RECTO ANT. C3

### BURLINGTON TAUPE 33X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP   |
|----------------|-----------|----------------|---------|
| <b>A038136</b> | 33X120    | 32,00          | EXTRUSI |



#### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|-------------------------------------------------------------|--------------|----------------------------------|

#### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | 0,5 % = Eb=3%           |
| Flexion resistance                   | EN ISO 10545-04 | => 30 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

#### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLA |
| Resistance to alkalis                                  | EN ISO 10545-13 | GLA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

#### ANTI-SLIP CHARACTERISTICS

|                            |                |         |
|----------------------------|----------------|---------|
| Slip resistance (Rd)       | UNE-EN 16165-C | Class 3 |
| Slip resistance (R)        | EN 16165-B     | R11     |
| Slip resistance (barefeet) | EN 16165-A     | C       |

## CUMBRIAN TAUPE RECT 30X90

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP   |
|----------------|-----------|----------------|---------|
| <b>A037881</b> | 30X90     | 10,40          | REVESTI |



### DIMENSIONS AND SURFACE PROPERTIES


|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                           |                 |                        |
|---------------------------|-----------------|------------------------|
| Water absorption capacity | EN ISO 10545-03 | >10%                   |
| Flexion resistance        | EN ISO 10545-04 | =>12 N/mm <sup>2</sup> |
| Thermal shock resistance  | EN ISO 10545-09 | It stands the test     |
| Cracking resistance       | EN ISO 10545-11 | It stands the test     |
| Frost resistance          | EN ISO 10545-12 | Not pass the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLA |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |



## LAVABO DE PIE ROMA

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040867</b> |           | 0,00           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES